


RUBBER

Static Co-Efficient of Friction Test (SCOF) Custom
Polished Concrete (Durotec Glasstone Data)

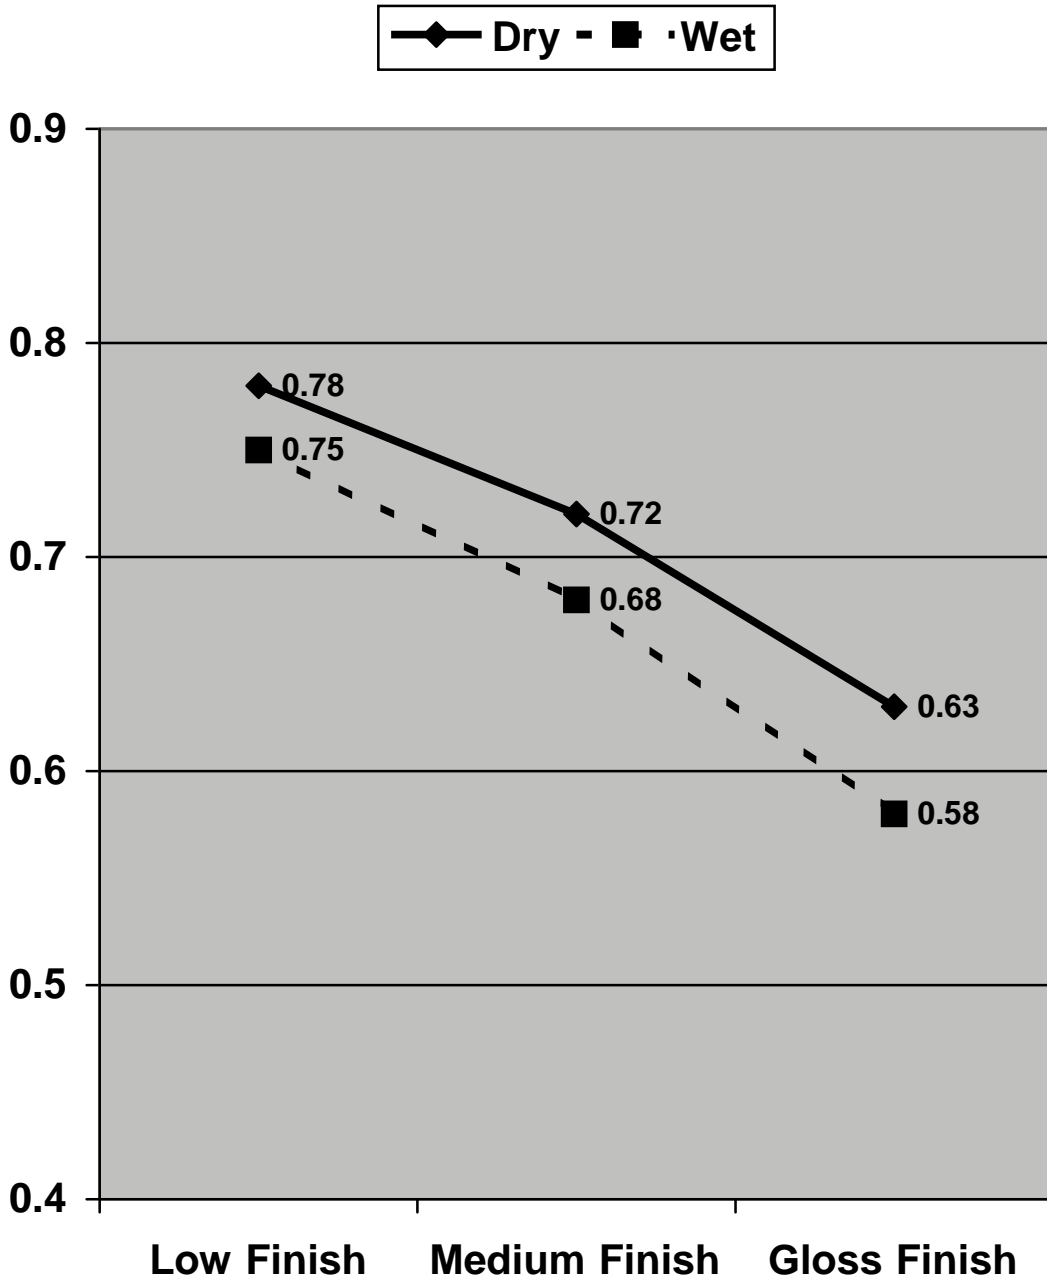

*NOTE – The Safe Zone is between 0.9 and 0.45